

| | | | |
|---------------|-----------|------|-----|
| SPECIFICATION | | PAGE | 1/3 |
| PART NUMBER : | TDX229060 | REV. | A |

SPECIFICATION

PART NO: TDX229060

【Approval Stamp Column 】

Customer :



STODA Technologies(Shantou)LTD

Tel : 0754-89918282

Website: www.stodatech.com

Email: sales@stodatech.com

Address: Huanshi east road, Chen nan street , Chaoyang , Shan tou, Guang dong P.R.C

| | | | |
|---------------|-----------|------|-----|
| SPECIFICATION | | PAGE | 2/3 |
| PART NUMBER : | TDX229060 | REV. | A |

1: PHYSICAL DIMENSION

BEFORE COATING


| | | | | | |
|------------------|------|---|-------|----|-----|
| OUTSIDE DIAMETER | (OD) | : | 22.86 | mm | MAX |
| INSIDE DIAMETER | (ID) | : | 13.97 | mm | MIN |
| HEIGHT | (HT) | : | 7.62 | mm | MAX |

AFTER COATING :

| | | | | | |
|------------------|------|---|-------|----|-----|
| OUTSIDE DIAMETER | (OD) | : | 23.62 | mm | MAX |
| INSIDE DIAMETER | (ID) | : | 13.39 | mm | MIN |
| HEIGHT | (HT) | : | 8.38 | mm | MAX |


2: CORE MAGNETIC PARAMETERS

| | | | | |
|--------------------------------|-------------------|---|-------|-----------------|
| EFFECTIVE MAGNETIC PATH LENGTH | (L _e) | : | 5.67 | cm |
| EFFECTIVE CROSS SEPCION AREA | (A _e) | : | 0.331 | cm ² |
| EFFECTIVE VOLUME | (V _e) | : | 1.88 | cm ³ |

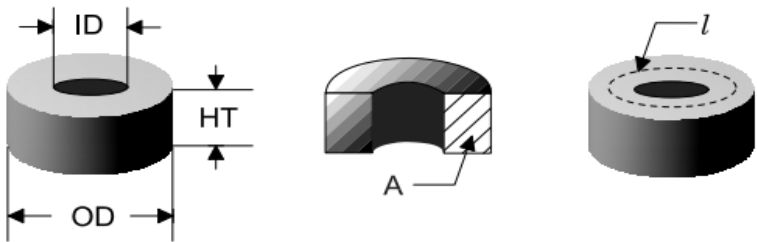

3: DC BIASED INDUCTANCE


| | | | |
|-----------------------------|---|--------|----|
| H _{DC} | : | 100 | Oe |
| PERCENT INITIAL PERM(NOM) | : | 57.79% | |
| PERCENT INITIAL PERM(MIN.) | : | 50.66% | |

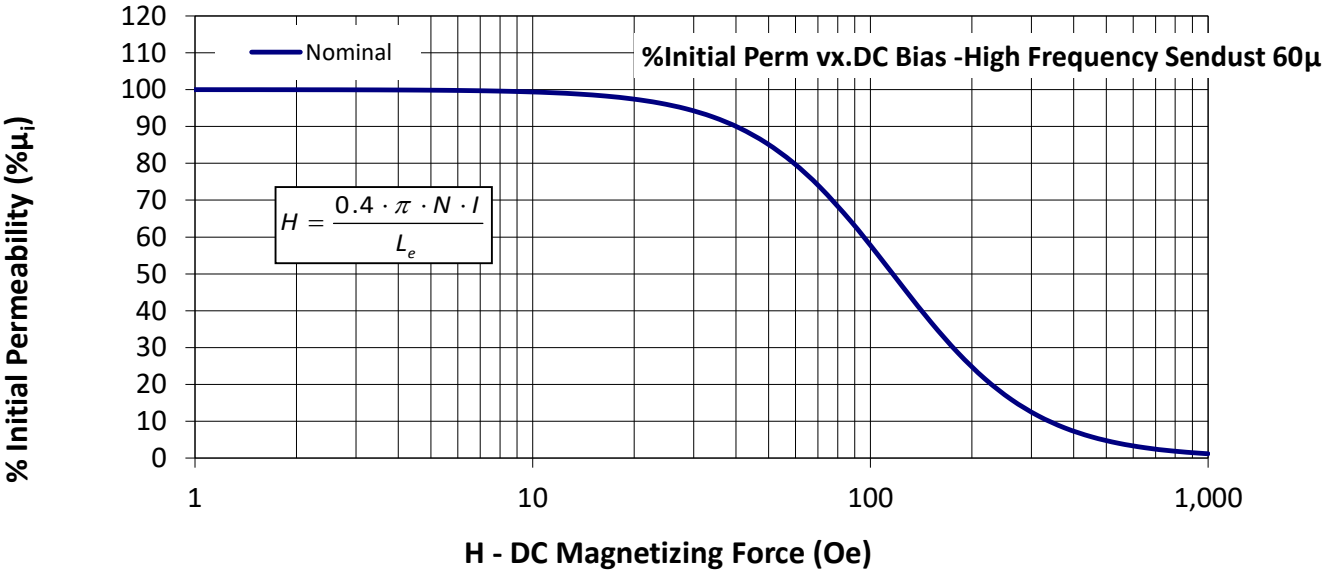

| | | | |
|---------------|-----------|------|-----|
| SPECIFICATION | | PAGE | 3/3 |
| PART NUMBER : | TDX229060 | REV. | A |

4: CORE LOSS

B_{pk} : 1000 G
 FREQUENCY : 50 kHz
 CORE LOSS (NOMINAL) : 120 mW/cm³
 CORE LOSS (MAXIMUM) : 140 mW/cm³

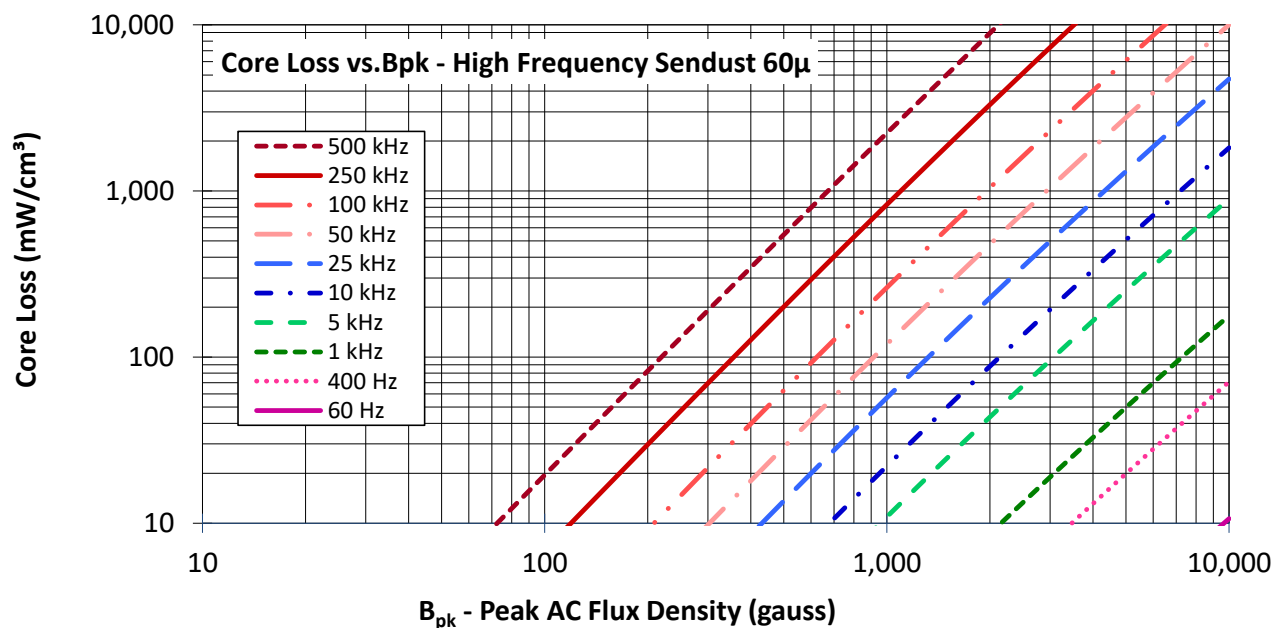

5: INDUCTANCE


μ_i (REFERENCE) : 60
 AL VALUE (NOMINAL) : 43 nH/N²
 FREQUENCY : 10kHz
 VOLTAGE ON TH2829A : 0.29V
 AL TOLERANCE : $\pm 8\%$
 TEST INSTRUMENT : TH2829A

6: COATING/PACKAGE

COATING TYPE : Black Epoxy
 VOLTAGE BREAKDOWN (MIN.) : 1000 Vrms
 LIMIT : 0.1 mA, 5 s
 PACKAGE QUANTITY : 1260 Pcs/Box

7: MATERIAL DESCRIPTION

85%Fe, 9%Si, 6%Al

| REVISION HISTORY | | | PREPARED | CHECKED | APPROVED |
|------------------|-------------|----------|---|---------|----------|
| REV. | DESCRIPTION | DATE | | | |
| A | FIRST ISSUE | 2022/6/8 |  | | |
| | | | | | |
| | | | | | |