

SPECIFICATION		PAGE	1/3
PART NUMBER :	TNF610060	REV.	A

SPECIFICATION

PART NO: TNF610060

【Approval Stamp Column 】

Customer :



STODA Technologies(Shantou)LTD

Tel : 0754-89918282

Website: www.stodatech.com

Email: sales@stodatech.com

Address: Huanshi east road, Chen nan street , Chaoyang , Shan tou, Guang dong P.R.C

SPECIFICATION		PAGE	2/3
PART NUMBER :	TNF610060	REV.	A

1: PHYSICAL DIMENSION

BEFORE COATING


OUTSIDE DIAMETER	(OD)	:	62	mm	MAX
INSIDE DIAMETER	(ID)	:	32.6	mm	MIN
HEIGHT	(HT)	:	25.00	mm	MAX

AFTER COATING :

OUTSIDE DIAMETER	(OD)	:	63.1	mm	MAX
INSIDE DIAMETER	(ID)	:	31.37	mm	MIN
HEIGHT	(HT)	:	26.27	mm	MAX


2: CORE MAGNETIC PARAMETERS

EFFECTIVE MAGNETIC PATH LENGTH	(L _e)	:	14.4	cm
EFFECTIVE CROSS SEPCION AREA	(A _e)	:	3.675	cm ²
EFFECTIVE VOLUME	(V _e)	:	52.81	cm ³

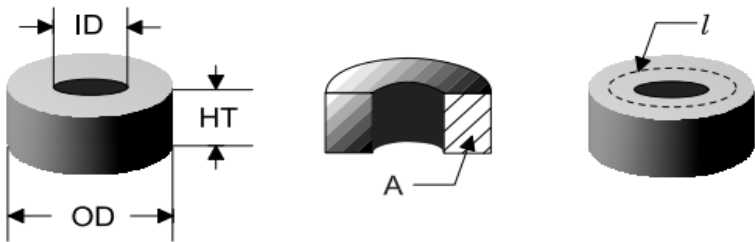

3: DC BIASED INDUCTANCE


H _{DC}	:	100	Oe
PERCENT INITIAL PERM(NOM)	:	74.15%	
PERCENT INITIAL PERM(MIN.)	:	68.14%	

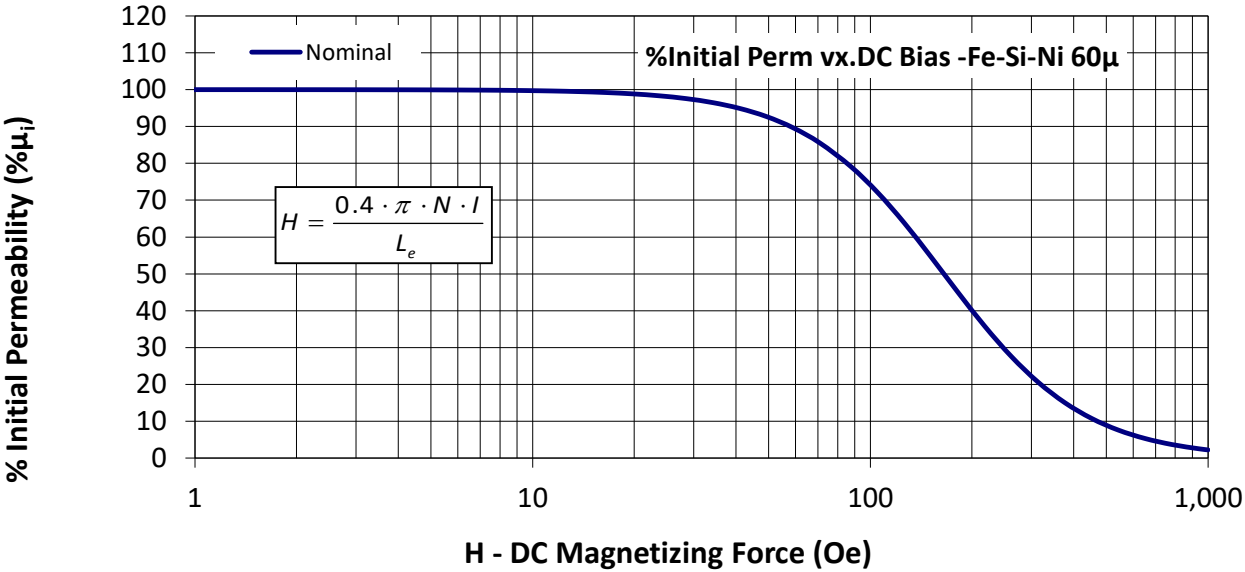

SPECIFICATION		PAGE	3/3
PART NUMBER :	TNF610060	REV.	A

4: CORE LOSS

B_{pk} : 1000 G
 FREQUENCY : 50 kHz
 CORE LOSS (NOMINAL) : 457 mW/cm³
 CORE LOSS (MAXIMUM) : 520 mW/cm³

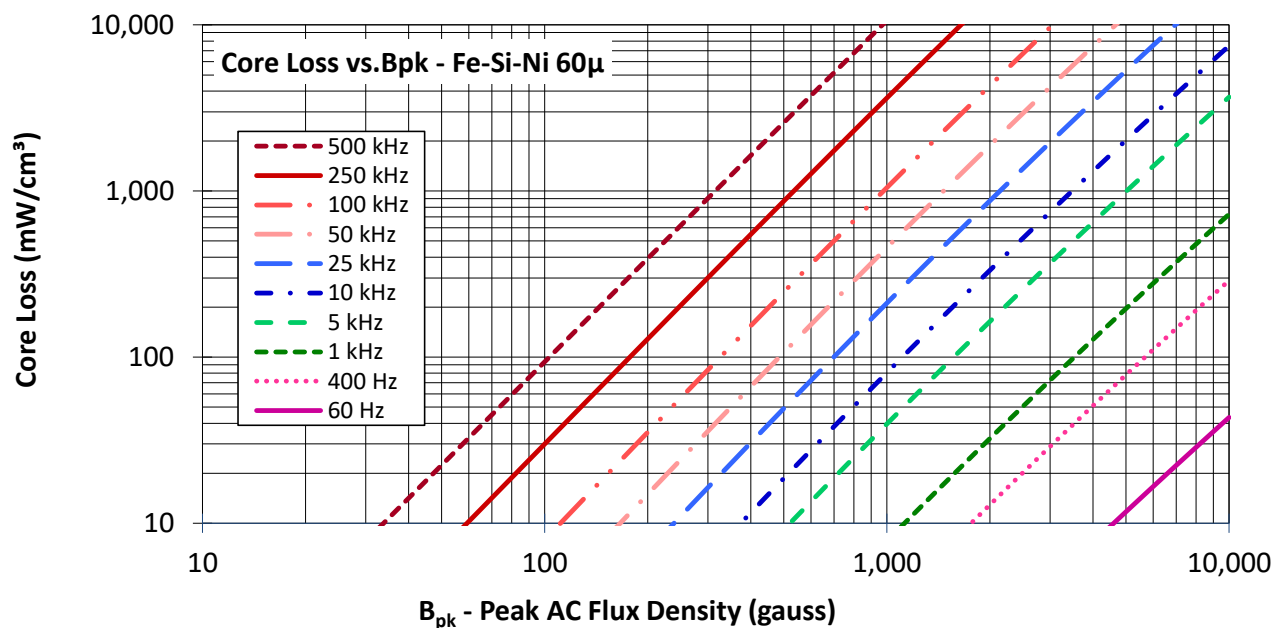

5: INDUCTANCE

μ_i (REFERENCE) : 60
 AL VALUE (NOMINAL) : 192 nH/N²
 FREQUENCY : 10kHz
 VOLTAGE ON TH2829A : 0.29V
 AL TOLERANCE : $\pm 8\%$
 TEST INSTRUMENT : TH2829A

6: COATING/PACKAGE

COATING TYPE : Red Epoxy
 VOLTAGE BREAKDOWN (MIN.) : 1000 Vrms
 LIMIT : 0.1 mA, 5 s
 PACKAGE QUANTITY : 27 Pcs/Box

7: MATERIAL DESCRIPTION

Fe, Si, Ni

REVISION HISTORY			PREPARED	CHECKED	APPROVED
REV.	DESCRIPTION	DATE			
A	FIRST ISSUE	2022/6/8			