

SPECIFICATION		PAGE	1/3
PART NUMBER :	TNF741060	REV.	A

**SPECIFICATION**

**PART NO:           TNF741060**

【Approval Stamp Column 】

Customer :



**STODA Technologies(Shantou)LTD**

**Tel : 0754-89918282**

**Website: [www.stodatech.com](http://www.stodatech.com)**

**Email: [sales@stodatech.com](mailto:sales@stodatech.com)**

**Address: Huanshi east road, Chen nan street , Chaoyang , Shan tou, Guang dong P.R.C**

SPECIFICATION		PAGE	2/3
PART NUMBER :	TNF741060	REV.	A

1: PHYSICAL DIMENSION

BEFORE COATING


OUTSIDE DIAMETER	(OD)	:	74.1	mm	MAX
INSIDE DIAMETER	(ID)	:	45.3	mm	MIN
HEIGHT	(HT)	:	35.00	mm	MAX

AFTER COATING :

OUTSIDE DIAMETER	(OD)	:	75.2	mm	MAX
INSIDE DIAMETER	(ID)	:	44.1	mm	MIN
HEIGHT	(HT)	:	36.20	mm	MAX


2: CORE MAGNETIC PARAMETERS

EFFECTIVE MAGNETIC PATH LENGTH	(L <sub>e</sub> )	:	18.4	cm
EFFECTIVE CROSS SEPCION AREA	(A <sub>e</sub> )	:	4.94	cm <sup>2</sup>
EFFECTIVE VOLUME	(V <sub>e</sub> )	:	90.90	cm <sup>3</sup>

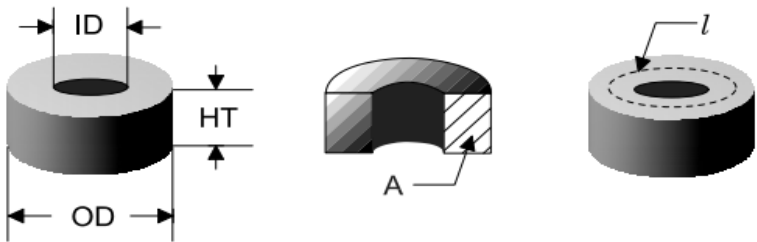

3: DC BIASED INDUCTANCE


H <sub>DC</sub>	:	100	Oe
PERCENT INITIAL PERM(NOM)	:	74.15%	
PERCENT INITIAL PERM(MIN. )	:	68.14%	

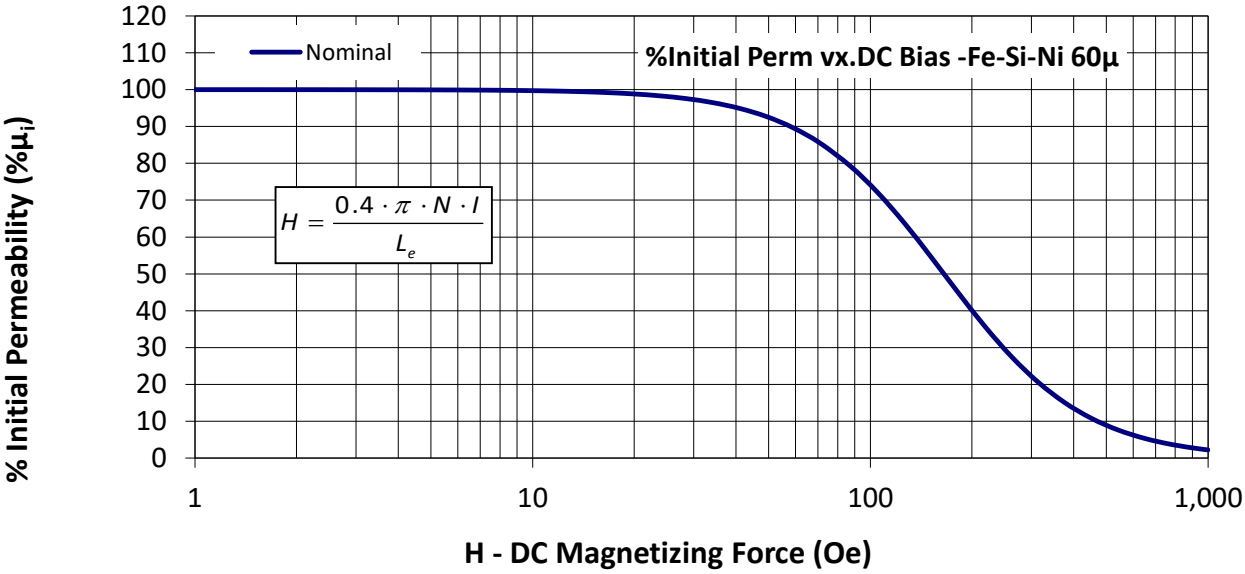

SPECIFICATION		PAGE	3/3
PART NUMBER :	TNF741060	REV.	A

#### 4: CORE LOSS

$B_{pk}$  : 1000 G  
 FREQUENCY : 50 kHz  
 CORE LOSS (NOMINAL) : 457 mW/cm<sup>3</sup>  
 CORE LOSS (MAXIMUM) : 520 mW/cm<sup>3</sup>

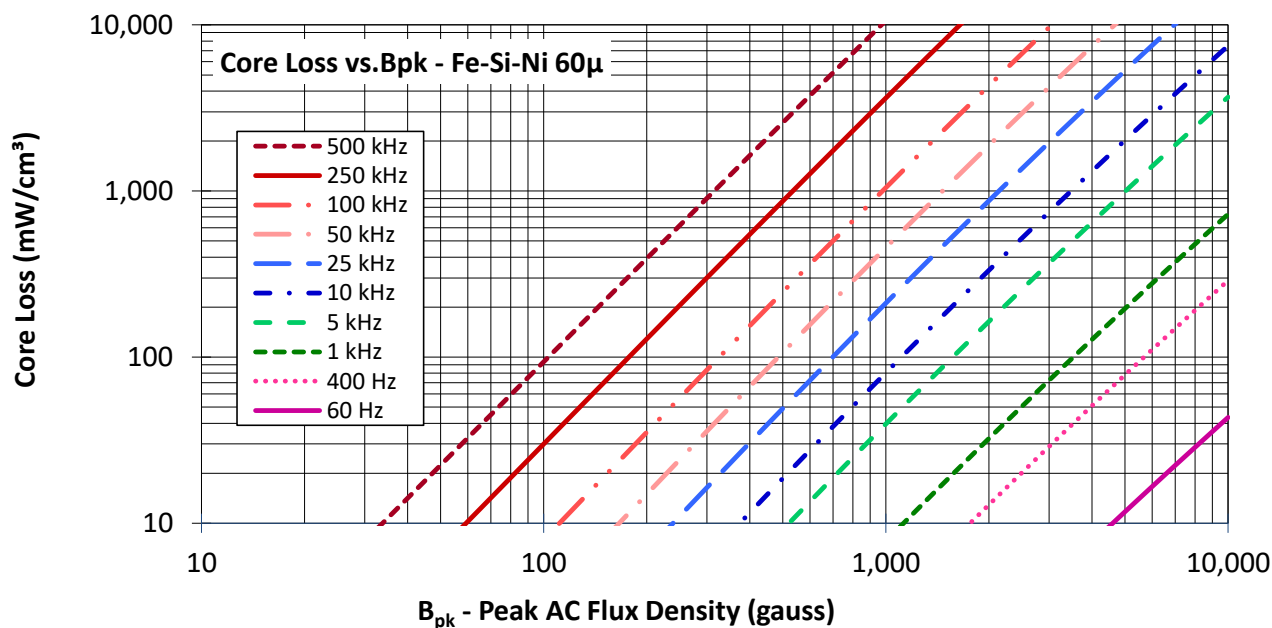

#### 5: INDUCTANCE

$\mu_i$  (REFERENCE) : 60  
 AL VALUE (NOMINAL) : 206 nH/N<sup>2</sup>  
 FREQUENCY : 10kHz  
 VOLTAGE ON TH2829A : 0.29V  
 AL TOLERANCE :  $\pm 8\%$   
 TEST INSTRUMENT : TH2829A

#### 6: COATING/PACKAGE

COATING TYPE : Red Epoxy  
 VOLTAGE BREAKDOWN (MIN.) : 1000 Vrms  
 LIMIT : 0.1 mA, 5 s  
 PACKAGE QUANTITY : 18 Pcs/Box

#### 7: MATERIAL DESCRIPTION

Fe, Si, Ni

REVISION HISTORY			PREPARED	CHECKED	APPROVED
REV.	DESCRIPTION	DATE			
A	FIRST ISSUE	2022/6/8			